

V511

DUAL PURPOSE DRYER - 2 GEAR

PRODUCT SPECS

Machine Dimensions

Width (in) (Shipping)	32-1/2" (40")
Depth (in) (Shipping)	37" (44")
Height (in) (Shipping) 1	84" (89")
Clearance (Rear/Sides)	1" / 10" min.
Door Swing	30"

Machine Weight

Crated Weight (lb)	800
--------------------	-----

Available Electrical

V511 - 2 WIRE (PLUG)	120V/1PH/60HZ - 15 A
----------------------	----------------------

Recommended Fuse

V511	20 A
------	------

Performance

AirFlow (cfm)	850
Heating (W)	1500

Included Equipment

Shelves	2
Glove Hangers	2
Gear Hangers	2

Warranty (yrs)

10


Note 1: w/o ducting



NFPA 1851 COMPLIANT





DO NOT SCALE FROM DRAWING



NOTES:

- 1) UNIT SHIPPED ENCLOSED IN PALLET
- 2) ADJUSTABLE FEET CAN BE REMOVED FOR MOVEMENT
- 3) ADJUSTMENT OF FEET 1/2" - 1"
- 4) DRYER HEAD CAN BE REMOVED ON REQUEST
- 5) 120V, 20A PLUG

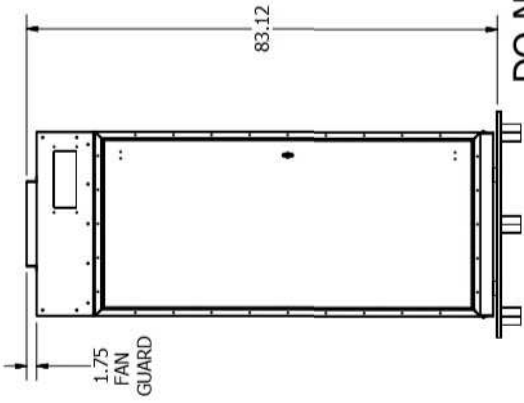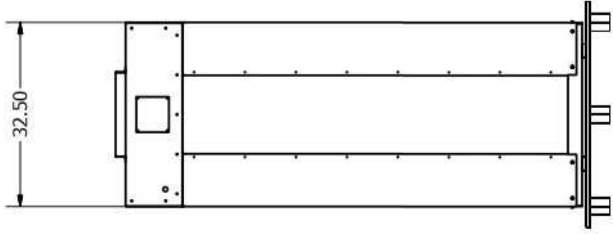

35.18
ADD 2" FOR HANDLES

DO NOT SCALE DRAWING

INTELLECTUAL PROPERTY OF CIRCUIL-AIR CORP.
THIS DOCUMENT IS THE PROPERTY OF CIRCUIL-AIR CORP. ANY REPRODUCTION IN WHOLE OR PART WITHOUT WRITTEN PERMISSION FROM CIRCUIL-AIR CORP IS PROHIBITED.

DRAWN Fenwick ODM	2020-02-19	CIRCUIL-AIR CORP.	
CHECKED	2020-01-01	TITLE	
QA		DUAL PURPOSE DRYER - 2 GEAR (2019)	
MFG CIRCUIL-AIR	2020-01-01	SIZE	REV
APPROVED CIRCUIL-AIR	2020-01-01	B	0
		DWG NO	
		45703002 - COMPLETE	
		SHEET 1 OF 1	

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL: +/- 1/16"
ANGULAR: +/- 0.5 DEG.
TWO PLACE DECIMAL: +/- .01"
THREE PLACE DECIMAL: +/- .001"
INTERPRET GEOMETRIC TOLERANCES PER: ANSI